


Product Introduction



MM-1000

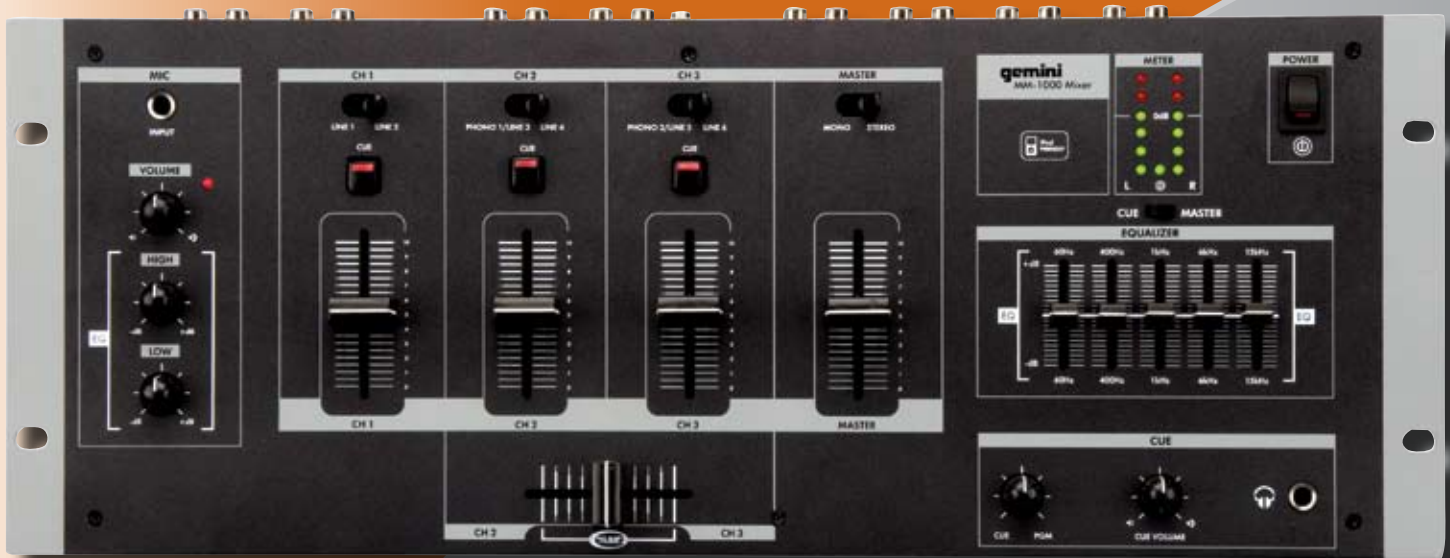

MM-3000

MM-1000

Introducing the **MM-1000** Professional 3 Channel Stereo Mixer. Offering the utmost bang for your buck, this 19-inch 3 channel professional mixer comes equipped with an extensive feature set tailored towards DJ's of all levels. Featuring 6 Line, 2 Phono/Line convertible RCA and 1 1/4" Mic inputs along with 5 Band EQ assigned to the Master output, 2 Band Mic EQ with Mic Gain Control, a user-replaceable RailGlide™ crossfader, 6 position VU meter with Cue/Master switch, Mono/Stereo Toggle switch and free iPod™ friendly cable for iPod™ connectivity, the **MM-1000** provides unparalleled value for satisfying all your mixing needs.



FEATURES

- 4U 19" Rack Mountable 3 Channel Professional Mixer
- 6 Line, 2 Phono/Line Convertible RCA & 1 1/4" Jack Mic Inputs
- 5 Band EQ Assigned to the Master Output.
- 2 Band Mic EQ with Mic Gain Control
- Cue/Program Rotary Control
- User Replaceable Rail Glide™ Crossfader
- Master and Record Output via RCA (Unbalanced)
- 6 Position VU Meter with Cue/Master Switch
- Mono/Stereo Toggle Switch
- iPod™ Friendly (Cable Included)

SPECIFICATIONS

GENERAL:

Frequency Response.....20Hz - 20KHz +/- 2dB
 Distortion.....< 0.02%
 S/N Ratio.....Better than 85 dB
 Headphone Impedance.....16 Ohm
 Power Source (External).....AC 15V, 500mA
 Unit Dimensions.....19" x 3.3" x 7"
(482.6 x 83.82 x 177.8 mm)
 Weight.....6.35 lbs (2.88 kg)

INPUTS:

Phono.....3mV, 47 KOhm
 Line.....150 mV, 27 KOhm
 MIC.....1.5 mV, 1 KOhm Balanced

OUTPUTS:

Max.....20V Peak-to-Peak
 Rec.....225 mV, 5 KOhm

*Specifications subject to change without notification for improvement

MM-3000

Tailored towards DJ's of all levels, the **MM-3000** Professional 19" 5 Channel Stereo Mixer provides unparalleled value to satisfy all your mixing needs. Feature packed with essentials such as 8 line, 3 Mic, 2 convertible Phono/Line RCA inputs, as well as 3 band rotary line EQ control per channel with cut feature, 2 band rotary MIC EQ control with cut feature, user-replaceable RailGlide™ cross fader, push-button cueing with cue/PGM fader control, balanced master output, XLR-1/4" combo Mic input, dual VU display with bright LED and Auto Talk-Over feature, Gemini delivers on it's promise of high-end products without the high-end price.



FEATURES

- 4U 19" Rack Mounted Club Mixer
- 5 Stereo Channels
- 8 Line, 3 Mic, 2 Convertible Phono/Line, RCA Inputs
- 3 Band Rotary Line EQ Control per Channel with Cut Feature
- Fully Removable, User Replaceable Rail Glide™ Crossfader
- Assignable Crossfader
- Rotary Gain Control per Channel
- Dual Display with Bright LED
- Push-button Cueing with Cue/PGM Fader Control
- Rotary Master, Zone, Balance & Cue Volume Controls
- Master, Zone & Record RCA Outputs
- Balanced Master Output
- XLR-1/4" Combo Mic Input
- 2 band Rotary Mic EQ Control with Cut Feature
- Rotary Mic Volume Control
- Auto Talk-Over Feature
- Face plate located 1/4" Headphone Input
- iPod™ Friendly (Cable Included)

SPECIFICATIONS

GENERAL:

Frequency Response.....20Hz - 20KHz +/- 2dB
 Distortion.....< 0.02%
 S/N Ratio.....Better than 85 dB
 Headphone Impedance.....16 Ohm
 Power Source.....115/230v, 50/60Hz, 20w
 Unit Dimensions.....19" x 4" x 7.42"
(482.6 x 101.6 x 188.6 mm)
 Weight.....8.84 lbs (4.01 kg)

INPUTS:

Phono.....3mV, 47 KOhm
 Line.....150 mV, 27 KOhm
 MIC.....1.5 mV, 1 KOhm Balanced

OUTPUTS:

Max.....20V Peak-to-Peak
 Rec.....225 mV, 5 KOhm

*Specifications subject to change without notification for improvement

GCI Technologies Corp.
 Gemini Sound Products, S.A.
 GCI Technologies Corp. GmBH
 GCI Technologies Corp., Ltd.
 GCI Technologies Corp., S.A.R.L.

1 Mayfield Avenue, Edison, NJ, USA 08837
 Caspe 172, 1A, 08013 Barcelona, Spain
 Lerchenstrasse 14, Haus 3 - 1. Stock, 80995 München, Munich, Germany
 Unit 44 Brambles Enterprise Center, Waterberry Drive, Waterlooville, PO7 7TH, UK
 Parc de Levenement 1, Allée d'Effiat, 91160 Longjumeau, France

T: +1 732 346 0061
 T: +34 93 436 37 00
 T: +49 (0) 89 319 019 80
 T: +44 (0) 87 087 00880
 T: +33 (0) 1 69 79 97 70

Email: sales@gci-technologies.com
 Email: info.spain@gci-technologies.com
 Email: info.germany@gci-technologies.com
 Email: sales.uk@gci-technologies.com
 Email: info.france@gci-technologies.com